



Water Shield®

UV RESISTANT 100% ACRYLIC, MULTI-SURFACE SEALER

PRODUCT DESCRIPTION

Water Shield is a clear, 100% Acrylic, multi-surface water-proofing sealer. Water Shield multi-surface sealer dries to a clear, transparent finish that prevents water and moisture infiltration. Water Shield can be used on wood, concrete, brick, masonry, canvas, driveways and other interior and exterior surfaces. This product will protect against chemical and salt water intrusion. Water Shield is ideal for new construction to prevent weathering and water damage by applying immediately after instillation.

APPLICATION:

Always apply Water Shield at temperatures above 50 degrees Fahrenheit using a brush, roller, pad applicator or pump sprayer. Use significant amounts of material to completely saturate the surface. Never apply a second-coat over a dry, first-coat as proper bonding may not occur. It is best to apply a second coat over wet-surface first-coat. Back rolling Water Shield can even application after spraying with spray applicator. If puddling occurs on horizontal surfaces remove excess within fifteen minutes by back-rolling or wiping off. ®

SPECIFICATIONS

ASTM C 309, Type 1 Class A & B

ASTM C 1315, Type 1, Class A

AASHTO Specifications M 148 Type 1 Class A & B

Water Shield has a shelf life of up to 2 years in its original unopened container.

COVERAGE RATE:

Brick – 200 sq. ft per gallon

Stucco – 300 sq. ft. per gallon

Wood – 150 sq. ft. per gallon

Concrete – 150 – 200 sq. ft. per gallon

USES & APPLICATIONS

- Decks
- Wood
- Concrete
- Brick
- Block
- Masonry
- Stucco
- Patios


TECHNICAL INFO

Solids.....12.5% Solids

Re-Coat Time.....30 Minutes

VOC Content.....60 g/L

Solvent resistance..... Minimal

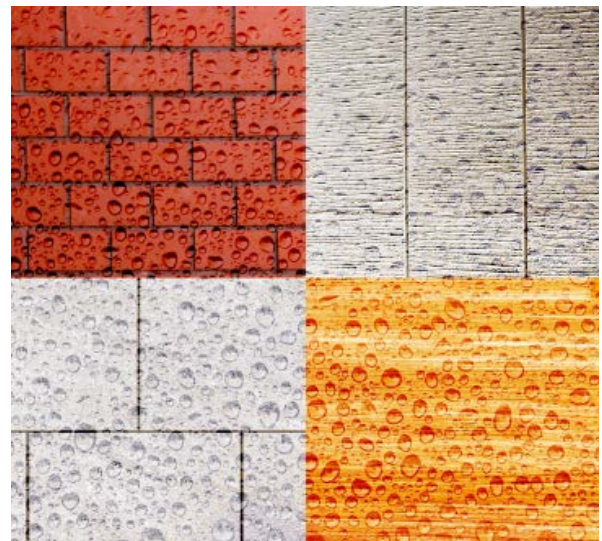

Water Shield

100% Acrylic Clear
Multi-Surface
Water Sealer

